



CLASSE H4 BORDO LATERALE - BARRIERA 3 ONDE SINGOLA SU RILEVATO W3

Class H4 Roadside - 3-waves single sided guardrail W3
 Gerammte 3 Wellen Leitplanke, Aufhaltestufe H4, Wirkungsbereich W3
 Classe H4 Bord latéral - Glissière 3 ondes simple sur remblai W3
 Clase H4 Borde lateral - Barrera de triple onda simple sobre base terreno W3

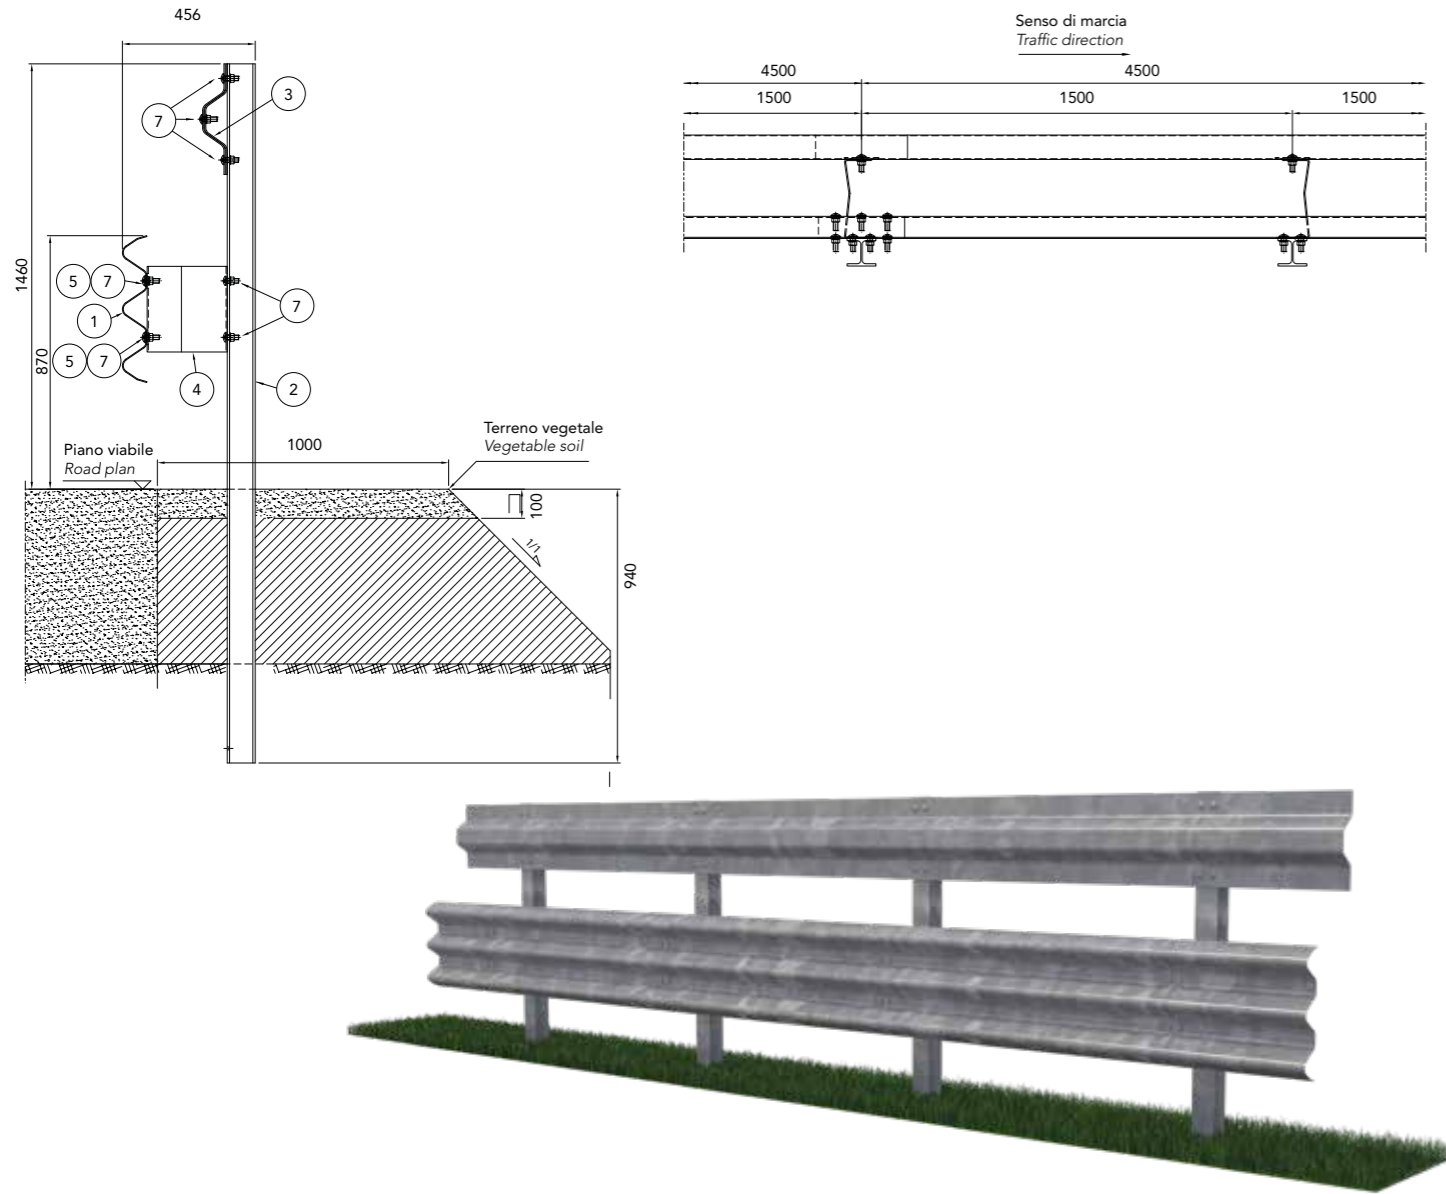

H4-W3

3-waves

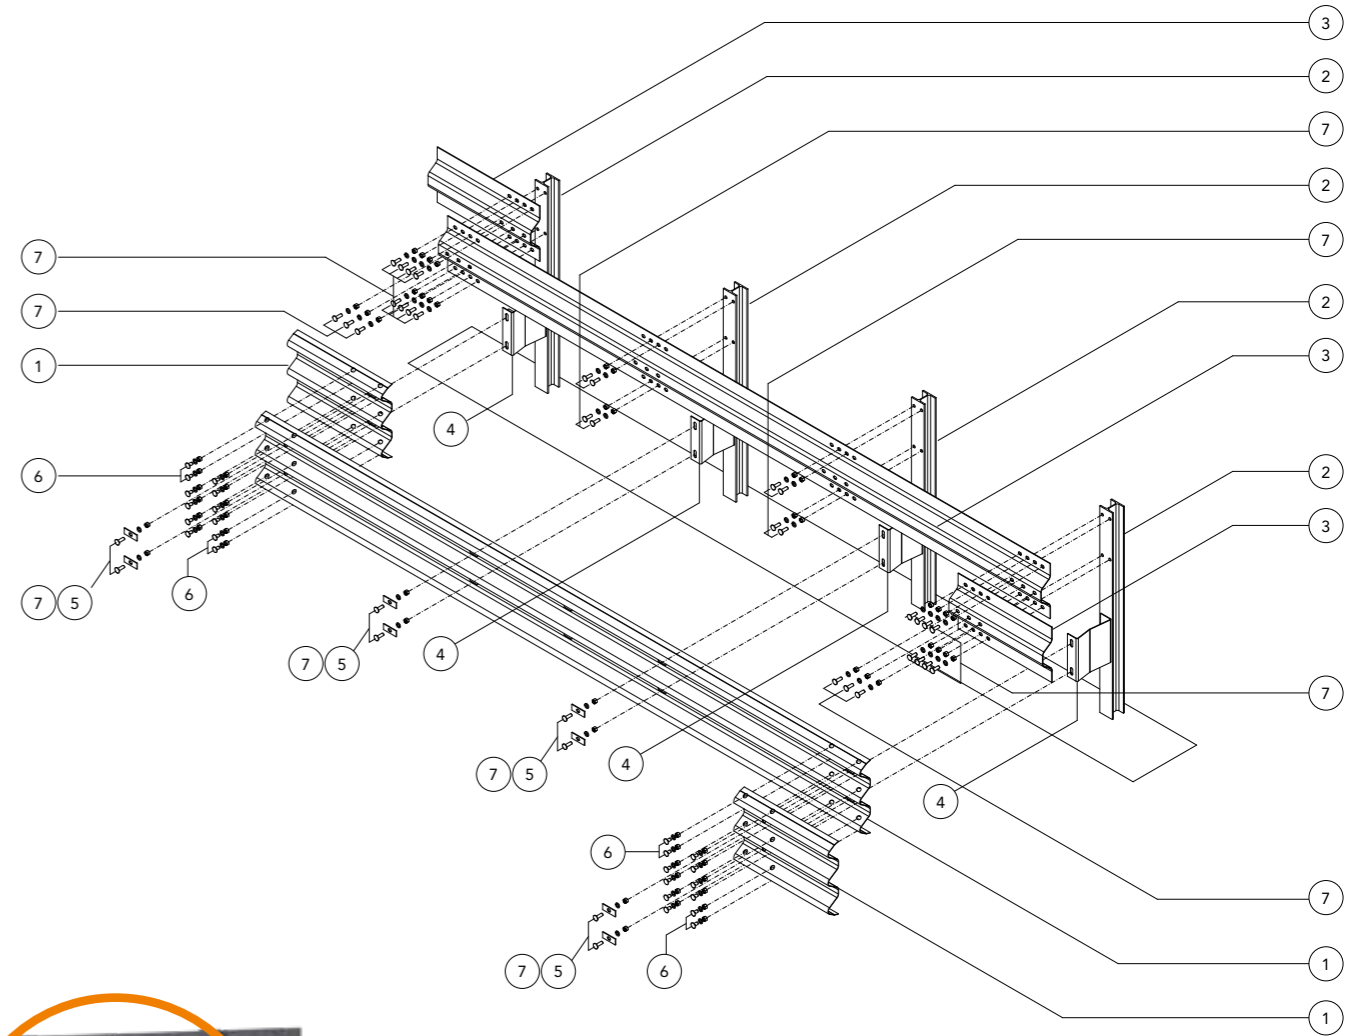

Caratteristiche Characteristics, Eigenschaften, Caractéristiques, Características	
Altezza nastro Strip height, Streifenhöhe, Hauteur de la bande, Altura de la franja	870 mm
Altezza fuori terra Height above ground level, Höhe über Grundboden, Hauteur hors sol, Altura sobre el suelo	1460 mm
Profondità d'infissione Depth of penetration, Rammtiefe, Profondeur de piling du poteau, Longitud hincada	940 mm
Ingombro trasversale Overall width, Gesamtbreite, Grosseur hors tout, Anchura total	456 mm
Interasse pali Post spacing, Steherabstand, Distance entre poteaux, Distancia entre postes	1500 mm

Rapporti di prova Crash test reports, Testberichte, Comptes rendus d'essais, Relaciones de pruebas											
Test n.	Facility	Test	Type	Barrier length m	Mass kg	Speed km/h	ASI max 1.4	THIV max 33 km/h	D m	Vi m	W m
Prova Endorsement 0086\ME\HRB\17	CSI	TB81	Laterale 20°	81	38.000	65	-	-	0,7	2,0=VI6	1,0=W3
PROVA 0078\ME\HRB\17	CSI	TB81					-	-			
PROVA 0033\ME\HRB\17	CSI	TB11	Laterale 20°	81	900	100	1,1=B	32	0,3		0,6=W1
Report FN/M/007/J		TB81	Laterale 20°	81	38.000	65	-	-	0,5	1,6=VI5	1,0=W3
Report FN/M/007/I		TB11	Laterale 20°	81	900	100	1,2=B	-	0,3		0,5=W1

Componenti Components, Bauteile, Composants, Elementos			
	Descrizione Description		Materiale Material
7	Bullone completo Bolt with nut and washer, Schraube komplett, Boulon complet, Tornillo completo con tuerca y arandela	M16x50 mm	Classe 8.8
6		M16x30 mm	Classe 8.8
5	Piastrina copriasola Slot covering plate, Lochabdeckplatte, Plaque de couverture fente, Placa cubre-ranura	100x40 Th=4 mm	S 275 JR
4	Distanziatore sagomato Spacer, Abstandhalter, Entretoise, Separador	Th=4 mm	S 275 JR
3	Trave superiore Upper T-beam, Geländerträger, Poutre supérieure, Viga superior	L=4800 mm Sv=450 mm Th=4 mm	S 355 JR
2	Profilo Profile, Profil, Perfil, Perfil	HEA100 L=2400 mm	S 275 JR
1	Fascia 3 onde 3-waves beam, 3-wellige Leitschiene, Glissière 3 ondes, Banda triple onda	L=4816 (1500x3) Th=2,5 mm	S 275 JR